


**KURA**

**ELECTRONICS & ELECTRICALS**

00:05

**PCB POWER RELAY, TELECOM RELAY, AUTOMOTIVE RELAY, GENERAL CONTROL REL**  
**Goodsky : Automotive**

- Home
- About Us
- Product ▶
- Contact Us
- Feedback

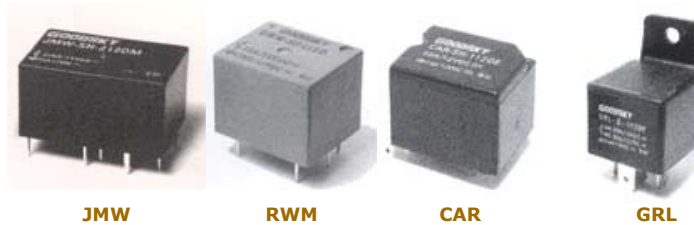

Part No.	Contact Rating Amperes	Contact Form	Contact Material	Coil Voltage in DC & AC	External Dimensions mm	Safety Standard	Features
<b>JMW</b>	5A	SPDM & DPDM	Ag Alloy	6V,9V, 12V,24V		Flow Solder Type Plastic Sealed	> Low Cost
<b>SAM</b>	10A	SPST SPDT DPDT DPST	Ag Alloy	5V,6V, 9V,12V, 18V,24V	23.2 x 17.2 x 16	Flow Solder Type Plastic Sealed	> Miniature Size > Large Switching Current > High Conductivity > Low Heat Radiation
<b>AR</b>	10A	SPST SPDT	Ag Alloy	5V,6V,9V, 12V,15V, 18V 24V	17.3 x 14.8 x 19.7	Open Type Flow Solder Type Plastic Sealed	> Low Cost > Bubble Test Confirmed to JIS standard
<b>JM</b>	10A	SPST SPDT DPDT DPST	Ag Alloy	6V, 9V, 10V, 12V	1P: 15.2x12 x13.4 2P:24x15.5 x13.6	Flow Solder Type Plastic Sealed	> Plastic Sealing Available
<b>ARW</b>	15A	SPST SPDT	Ag Alloy	5V,6V,9V, 12V, 15V, 18V 24V	17.3 x 14.8 x 19.7	Flow Solder Type Plastic Sealed	> Low Cost > Bubble Test Confirmed to JIS standard
<b>RWM</b>	15A	SPST SPDT	Ag Alloy	9V, 12V, 24V	19 x 15.4 x 15	Flow Solder Type Plastic Sealed	
<b>JM-2P</b>	20A	SPST SPDT DPDT DPST	Ag Alloy	6V,9V,10V, 12V	24 x 15.5 x 13.6	Flow Solder Type Plastic Sealed	> Plastic Sealing Available
<b>CAR</b>	30A	SPST SPDT	Ag Alloy	6V,12V, 24V	26.2 x 21.2 x 20.2	Open Type Flow Solder Type Plastic Sealed	> Special Contact Material
<b>GRL</b>	30A	SPST SPDT DPST	Ag Alloy	12V,24V	28 x 28 x 25	Hand Soldered Type	> Low Cost > Compatible fasten terminal arrangement

Designed by : MID Hosted by : PBD Promoted by : GID